




300 S. DAYTON ST.
 DAVISON, MI 48423
 PH: 810-653-9626
 FAX: 810-654-2616


1006-2424RC

DESCRIPTION:

24" Con to 24" PI

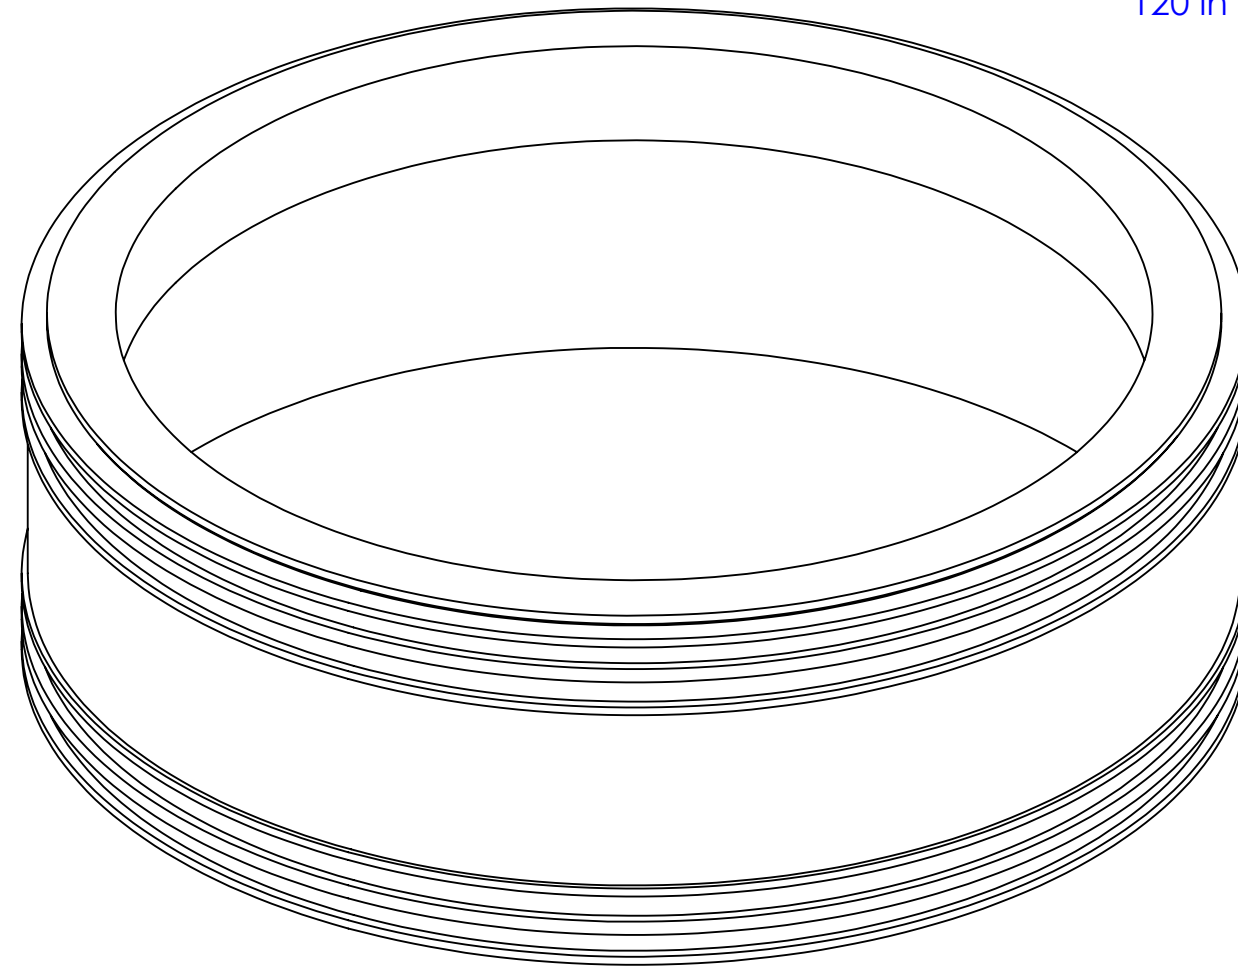

300SS Clamps (4) Locations
 120 in lbs Installation Torque

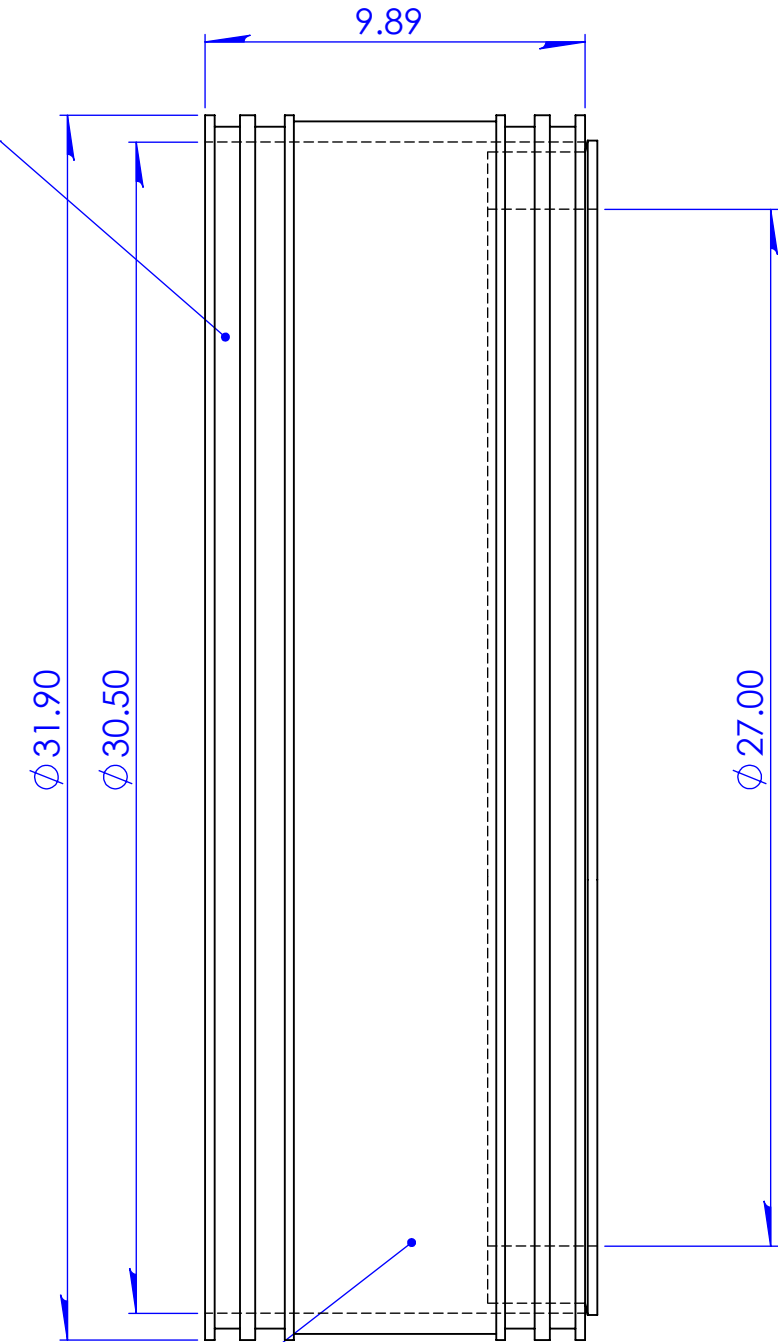

300SS Shield, .012" x 5.0"
 60 in lb Installation Torque

Notes

Equipped with SRC-99 .012x5.00 shield & 2) SS Hose Clamps

Coupling equipped with 4) SS Hose Clamps

TOLERANCES:
 Fractional $\pm 1/8$
 .XX = $\pm .06$
 ANG. = $\pm 3^\circ$
 UNLESS OTHERWISE SPECIFIED

Part Weight		Installation Torque	120 in lbs
Min/Max Temp.	-30/140 Degrees F	Conforms to ASTM	D5926, C1173
Pressure Tested	Gravity Flow	Clamps used	300 Series Stainless
Material	Flexible PVC 60 Duro Shore A	Box Quantity	

UNITS:	INCHES
SIZE:	A
3RD ANGLE PROJECTION	
DO NOT SCALE DRAWING	

DESIGNER:	N. Goddard
CHECKER:	
DATE:	12/22/2015

SCALE:	not to scale
SHEET	1 OF 1

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 FERNCO, INC. ANY REPRODUCTION IN
 PART OR AS A WHOLE WITHOUT THE
 WRITTEN PERMISSION OF FERNCO, INC.
 IS PROHIBITED.